


# UNIBIND H20A


## AUTOMATIC PERFECT BINDING MACHINE

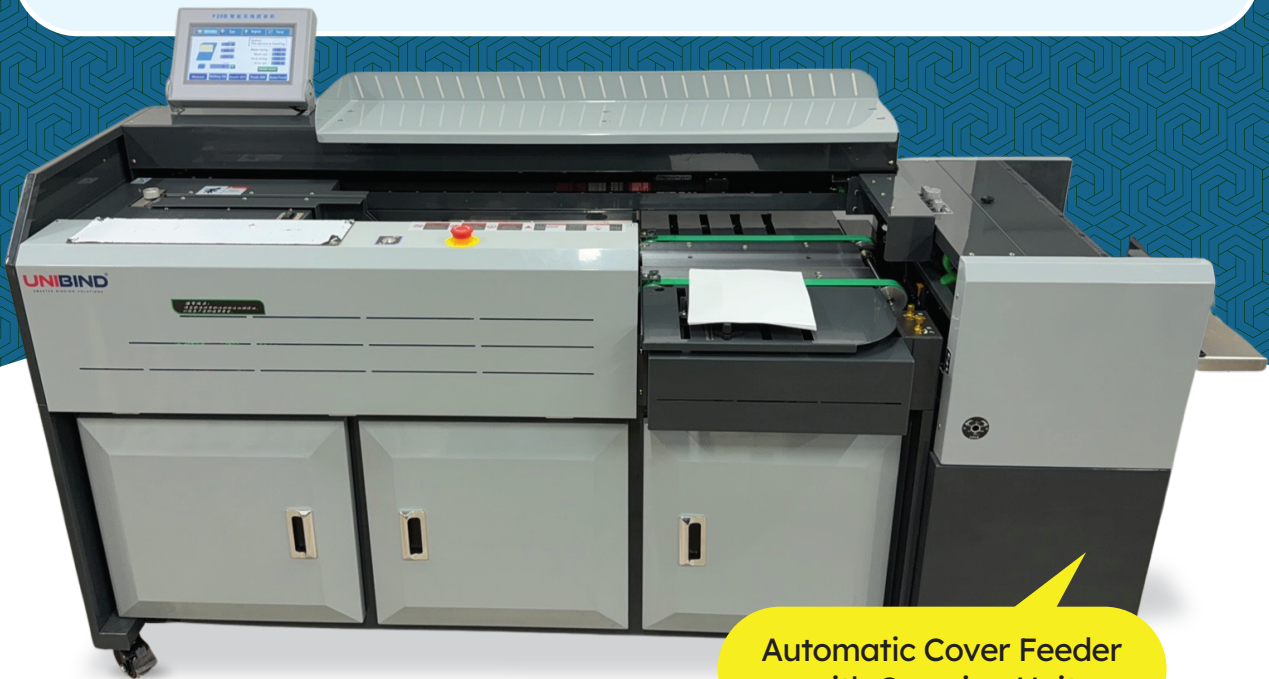

Automatic Cover Feeder  
with Creasing Unit


## Specifications

Model	Unibind H20A	Maximum Cover Size	660x425mm
MAX. Binding Thickness	60MM	Gluing System	Triple Glue Wheel + Side Glue
Binding Speed	500 books/hour	Melting Time	<30Min
Binding Method	Manual & Automatic	Folding Style	3-Fold
Max. Book Length	440MM	Volatge/Power	220V/3500W
Cutting Mechanism	Small Sharp Blade + Disc Milling Cutter	Maximum Stacking Height	100mm




### Front/Rear Stepper Motor Control One-touch CNC System for Cover Length Adjustment

Minimum 300mm Creasing Feed Supported




### Auto-lifting Platform

The clamping table automatically adjusts its height according to book thickness to achieve desired binding effect



### Fully Automated Circuit Control

Utilizes original imported electronic components with intelligent circuit control, featuring auto-detection, photoelectric sensing, and motor fault display.



### 100mm Cover Feeding Table

100mm-thick stacking platform enables effortless placement and precise positioning -Integrated air-blow/suction system ensures stable creasing



High-Speed Carriage on Dual Guide Rails with Brake Motor Positioning — Guarantees Precise and Reliable Stopping Accuracy.




### 10.4-inch Color Touchscreen

The 10.4-inch color touchscreen provides intuitive operation for fast and easy use. Freely adjustable parameters for customized settings. Seamless switching between manual and automatic modes. Ideal for both rush jobs and high-volume production



### Pure Aluminum (New Integrated Large Glue Tank) with Independent Temperature Control

3 Glue Rollers + Side Glue Roller, All-Aluminum Glue Tank Ensures Trouble-Free Glue Application. Perfect Binding Results for Books of Various Thicknesses. Independent Temperature Control for Fast and Even Heating



### Feeder Auto Cover Feeding System

Full-auto feeder ensures stable & high-efficiency cover feeding. Eliminates inefficient manual paper loading-NC-controlled quadruple creasing adjustment-Produces neat and aesthetically perfect book blocks. Dor-Free Operation While Preserving Hot Melt Adhesive Properties and Color Integrity

+91 98336 63100 | +91 93243 76523

[sales@ashwinenterprises.org](mailto:sales@ashwinenterprises.org) | [www.ashwinenterprises.org](http://www.ashwinenterprises.org)

Unit no.: 35/G, Apollo Industrial Estate, Behind Holy Family School,  
Off. Mahakali Caves Road, Andheri East, Mumbai-400093.

Regional Office :

New Delhi | Ahmedabad | Bengaluru  
Kerala | Chennai | Madurai  
Coimbatore | Hyderabad  
Andhra Pradesh | Nagpur | Surat